



भा.कृ.अनु.प.-केन्द्रीय उपोष्ण बागवानी संस्थान
रहमानखेड़ा, डाकघर काकोरी, लखनऊ-226 101 (भारत)
ICAR-Central Institute for Subtropical Horticulture
Rehmankhhera, P.O. Kakori, Lucknow - 226 101 (India)



F.No. 12-124/W/2020

Dated: 21.08.2020

CORRIGENDUM-2

In partial modification of open tender ref. no. 12-124/W/2020 dated 27.07.2020 (Tender ID No. 2020_DARE_573955_1), the clarification regarding specification of shed along with revised site for construction of organic input production shed is annexed below.

The other contents and terms & condition of the said open tender dated 27.07.2020 shall remain unchanged.

R.N. Mallik
21.08.2020

(R.N. Mallik)
Sr. Adm. Officer

Annexure- As above

Name of the work: The shed for organic input [BOQ For one shed]					
S.No	Particulars	Unit	Quantity	Rate	Amount
1	Earth work in excavation by mechanical means (Hydraulic excavator) / manual means in foundation trenches or drains (not exceeding 1.5 m in width or 10 sqm on plan), including dressing of sides and ramming of bottoms, lift upto 1.5 m, including getting out the excavated soil and disposal of surplus excavated soil as directed, within a lead of 50 m. All kinds of soil.	cum	2.74		
2	Filling available excavated earth (excluding rock) in trenches, plinth, sides of foundations etc. in layers not exceeding 20cm in depth, consolidating each deposited layer by ramming and watering, lead up to 50 m and lift upto 1.5 m.	cum	0.54		
3	Providing and laying cement concrete in retaining walls, return walls, walls (any thickness) including attached pilasters, columns, piers, abutments, pillars, posts, struts, buttresses, string or lacing courses, parapets, coping, bed blocks, anchor blocks, plain window sills, fillets, sunken floor etc., up to floor five level, excluding the cost of centering, shuttering and finishing: 1:2:4 (1 cement : 2 coarse sand (zone-III) : 4 graded stone aggregate 20 mm nominal size).	cum	0.7		
4	Brick work with common burnt clay modular bricks of class designation 7.5 in foundation and plinth in : 1 Cement mortar 1:6 (1 cement : 6 coarse sand)	cum	4.75		
5	Steel work in built up tubular (round, square or rectangular hollow tubes etc.) trusses etc., including cutting, hoisting, fixing in position and applying a priming coat of approved steel primer, including welding and bolted with special shaped washers etc. complete. Electric resistance or induction butt welded tubes. (ISI Marked), Nominal bore - 40 mm Light A class weight 3.25 kg/metre (wall thickness - 2.9 mm), 32 mm Light A class weight 2.58 kg/metre (wall thickness - 2.65 mm), 25 mm Light A class weight 2.01 kg/metre (wall thickness - 2.65 mm).	kg	548		

Bajaj Ram
20/08/2020

(Baby Ram)
CTO (Civil)
NBFG R

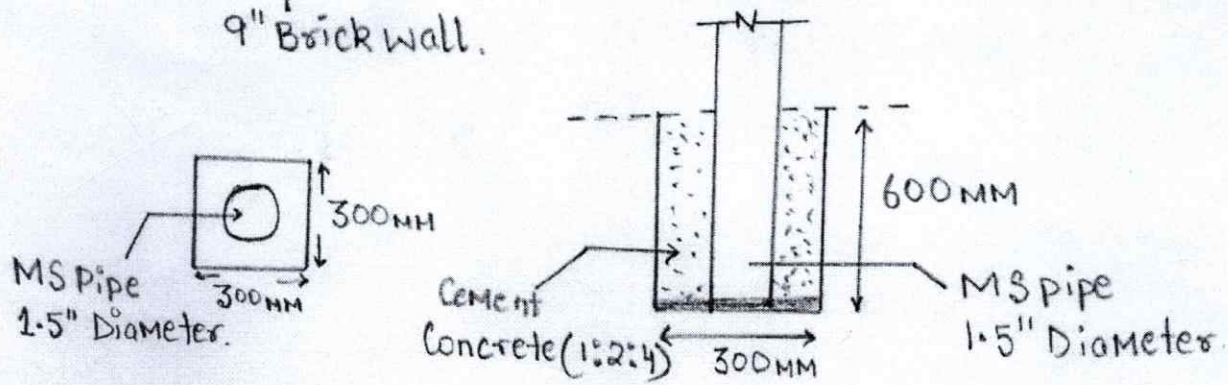
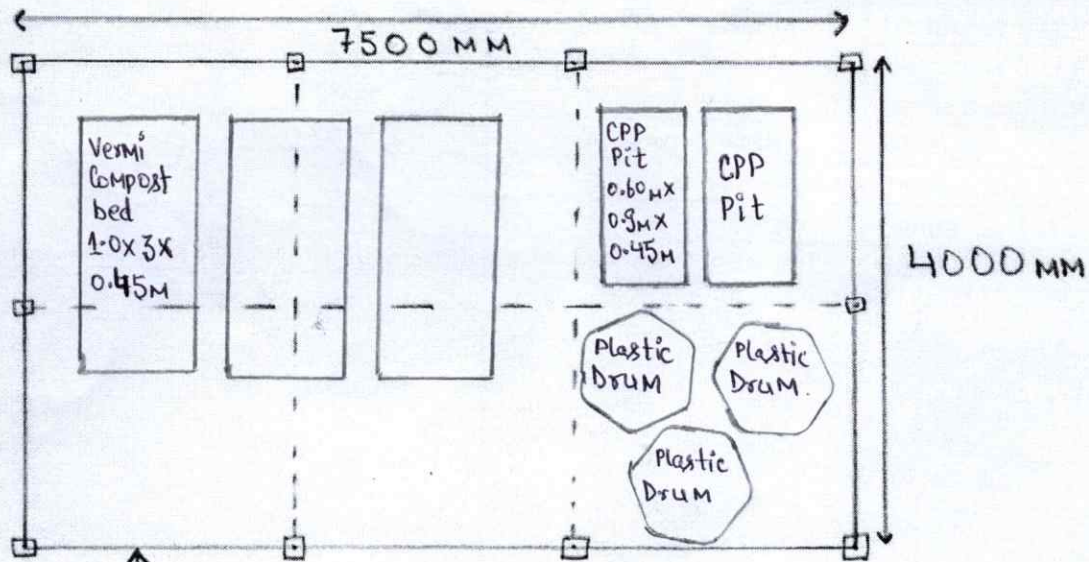
Am
(Anil Verma)
Scientist (SG)

6	Providing reinforced by organic fibres and/or inorganic synthetic fibres cement 6 mm thick corrugated sheets (as per IS: 14871) roofing up to any pitch and fixing with polymer coated J, or L hooks, bolts and nuts 8 mm dia. G.I. plain and bitumen washers or with self drilling fastener and EPDM washers etc. complete(excluding the cost of purlins, rafters and trusses), including cutting sheets to size and shape wherever required. (ISI Marked).	sqm	55.76		
7	Providing and fixing ridges and hips in fibre cement reinforced by organic fibres and/or inorganic synthetic fibres roofing with suitable fixing accessories or self drilling fastener and EPDM washer etc. complete. Corrugated serrated adjustable ridges.(ISI Marked)	metre	8		
8	12 mm cement plaster of mix :1:6 (1 cement: 6 Fine sand)	sqm	20		
9	Painting with synthetic enamel paint of approved brand and manufacture to give an even shade :Two or more coats on newwork.(Berger/Asian/Nerolac)	sqm	22		
10	Supply 200 litre capacity drum	each	3		
		Total Amount In rupees			
Note - Base plan, foundation details and front view of structure attached with this estimate.					

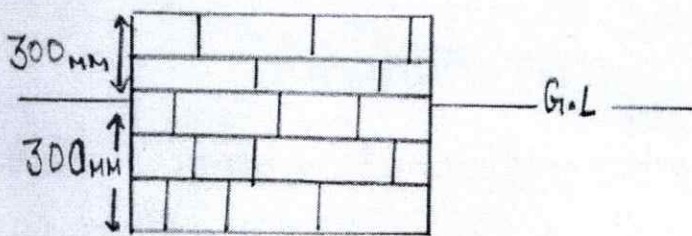

 29/08/2020



Base Plan



Foundation



9" Brick Wall

R₂

List of villages for construction of organic inputs shed

	Village	Post office	Block	Tehsil	District	State
1.	Turna	Bhaisai	Sarila	Sarila	Hamirpur	U.P.
2.	Pahra	Amoond	Sarila	Sarila	Hamirpur	U.P.
3.	Umaria	Umaria	Gohand	Sarila	Hamirpur	U.P.
4.	Alkachhwa-1	Alkachhwa	Sarila	Sarila	Hamirpur	U.P.
5.	Alkachhwa-2	Alkachhwa	Sarila	Sarila	Hamirpur	U.P.
6.	Chilli	Chilli	Gohand	Rath	Hamirpur	U.P.
7.	Chilli	Chilli	Gohand	Rath	Hamirpur	U.P.
8.	Keeratpur	Shaili	Fatehpur	Fatehpur	Barabanki	U.P.
9.	Kherwa	Masuri	Mahua	Naraini	Banda	U.P.
10.	Saunta Syondha	Saunta Syondha	Mahua	Naraini	Banda	U.P.

Rm
(R.A. Ram)